

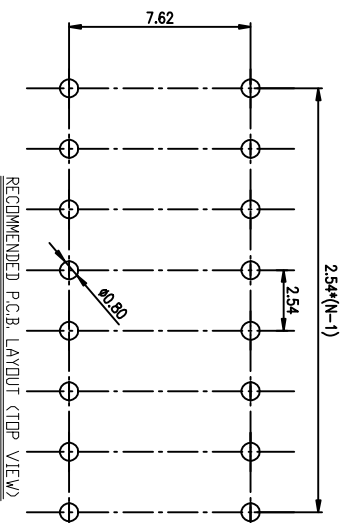
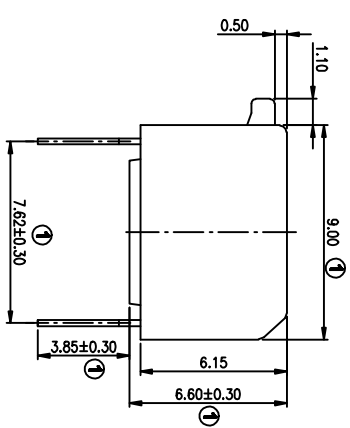



PRODUCT NO. DSPV08LHGCT  
RoHS compliant

NOTES : 1 Specification:  
1>.Operating force:10000gf Max  
2>.Operating Temperature: -40° to+85°  
3>.Storage Temperature: -40° to+85°  
4>.Mechanical Life:3000cycles minimum  
5>Electrical Life:2000cycles minimum

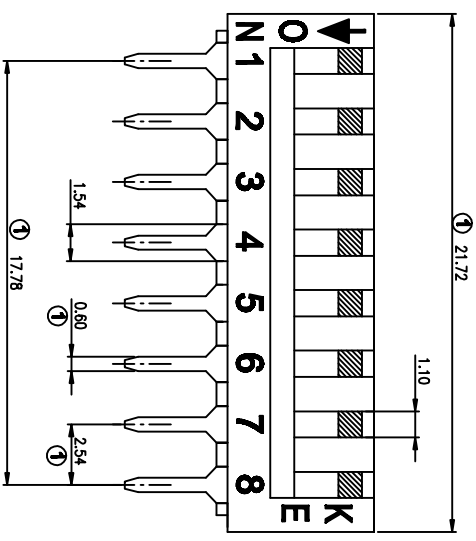

DS XX T S G E T  
 [Packing: T=Tube R=Reel]  
 [Finish: F=3u" Gold-plated F=10u" Gold-plated]  
 [Finish: G=Full Gold S=Contact-Gold-plated]  
 [Terminal: S=SMD type B=Strait:.....]  
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]  
 [HP=Half-Pitch IC=IC type PV=Plano type]

- PART NUMBER DESCRIPTION :
- CONTACT RATING:  
1.SWITCHING: 25mA at 24VDC  
2.NON-SWITCHING: 100mA at 50VDC  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
- PLATING:  
GOLD FLASH 1u"(min.) SOLDER TALL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLES	PROJECTION
0 ± 0.25	0 ± 2°	COPY
.00 ± 0.15	.0 ± 1°	INSPECTION
.000± 0.10	.00± 0.5°	APPX

FILE NO.	UNIT	SCALE	SHEET	REV.
DSPV08LHGCT-A	mm	1:1	1	A

**瑞登精密電子股份有限公司**  
DongGuan Kingtek Industrial Co., Ltd.

TITLE: BY DSPV SERIES PITCH 2.54mm  
 PRODUCT FAMILY: DSPV SERIES  
 PRAT NO.: DSPV08LHGCT  
 DRAWING: CHECK APPRO.  
 SIZE: A4